




Premium-Multi-Line Extension Socket

- Quality extension sockets in top design and modern colour combinations.
- Attractive, timeless, sturdy housing made from aluminium with hardwearing, matt-finished surfaces.
- With 2 holes on either side suitable for wall-mounting.
- Universal system, 3 plug applications in one; special system allows to plug-in BS, U.S. and Euro-plugs.
- Innovative and individual fixture system.
- Childproof socket.
- Excess cable can be wound around the housing.
- With illuminated 2-pole ON/OFF switch.
- Packaging: Shrink-wrapped - for protection against dust and contamination.

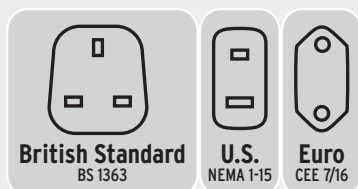

Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
3-way, 3 m cable									
1 95133 7 900	626878	4	3 m	05VV-F 3G1,25	42 cm	3	Black/Blue	13 A	BS 1363
3-way, 5 m cable									
1 95153 7 900	626885	4	5 m	05VV-F 3G1,25	42 cm	3	Black/Light Grey	13 A	BS 1363
5-way, 3 m cable									
1 15600 7 135	565870	4	3 m	05VV-F 3G1,25	42 cm	5	Black	13 A	BS 1363
1 15605 7 135	591084	4	3 m	05VV-F 3G1,25	42 cm	5	Black/Light Grey	13 A	BS 1363
1 15603 7 135	591077	4	3 m	05VV-F 3G1,25	42 cm	5	Black/Blue	13 A	BS 1363
1 15655 7 135	591107	4	3 m	05VV-F 3G1,25	42 cm	5	Light Grey	13 A	BS 1363
1 15650 7 135	565917	4	3 m	05VV-F 3G1,25	42 cm	5	Light Grey/Black	13 A	BS 1363

Power Distribution
BS / CEE

Extension Sockets
& Plug-in Appliances
BS / Lightning & Surge Protection

Power Distribution
Multi-Line

Extension Sockets
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



Garant® 110 V CEE 2 Cable Reel

Top in quality and design, for every requirement and use.

- No more dangerous twisting of connected appliances when winding or unwinding.
- No more plugging in or out when moving the cable reel.
- Avoids unnecessary actions!
- Reel body made from special break-resistant Breflexx rubber fitted to a galvanised steel tube frame.
- With twin socket 110 V/16 A.
- Ergonomic cable guide handle for perfect cable-management during winding.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 14877 3	140909	1	25 m	H05VV-F 3G1,5	Plastic	Yellow	240 mm	16 A	110 V
1 13887 3	140879	1	50 m	H05VV-F 3G1,5	Plastic	Yellow	290 mm	16 A	110 V
1 13195 3	059805	1	25 m	H05VV-F 3G2,5 extra heavy-duty cable	Plastic	Yellow	240 mm	16 A	110 V

Design protected.



With Bretec® non-turning socket system. Socket outlet remains stationary while reel body rotates. Prevents the cable of appliances connected from twisting while winding.

Garant® Bretec® 110 V CEE 2 Cable Reel

With the unique Bretec® Anti Cable Twist System for comfortable working.

- No more dangerous twisting of connected appliances when winding or unwinding.
- No more plugging in or out when moving the cable reel.
- Avoids unnecessary actions!
- With twin socket 110 V/16 A.
- Innovative and ergonomic cable guide handle „cable pilot“ for perfect cable-management during winding. Handle commutes on both sides and allows easy carrying and cable storage. For right and left handed easy to rewind.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 14885 3	140923	1	25 m	H05VV-F 3G1,5	Plastic	Yellow	240 mm	16 A	110 V
1 14886 3	166923	1	50 m	H05VV-F 3G1,5	Plastic	Yellow	290 mm	16 A	110 V

Design protected. / Patent pending.

Power Distribution

Lightning & Surge Protection

Multi-Way-Extensions & Plug-In Appliances

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Industrial Ladders

Advertising Media



Garant® CEE 2 IP 44 Cable Reel For Site & Industry

Practical and suitable for outdoor use, IP 44.

- Tested acc. to EN 61316.
- Reel body made from special plastic fitted to a galvanised steel tube frame.
- Innovative and ergonomic cable guide handle „cable pilot“ for perfect cable-management during winding. Handle commutes on both sides and allows easy carrying and cable storage. For right and left handed easy to rewind.
- Cable: RN cable is very robust, oil resistant and especially suited for professional use and on site.
- CEE plug 230 V/16 A,
2 CEE sockets 230 V/16 A.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current
1 18276 0	140572	1	25 m	H07RN-F 3G2,5	Rubber-Neoprene	Black	290 mm	16 A

Design protected. / Patent pending.



Garant® CEE 2 IP 44 Cable Reel

For constant use outdoors, IP 44.

- Reel body made from special plastic fitted to a galvanised steel tube frame.
- CEE plug 230 V/16 A,
2 CEE sockets 230 V/16 A.
- Innovative and ergonomic cable guide handle „cable pilot“ for perfect cable-management during winding. Handle commutes on both sides and allows easy carrying and cable storage. For right and left handed easy to rewind.
- Cable: **BREMAXX**® cable specification: extremely sturdy, remains highly flexible even at low temperature down to -35 °C, oil resistant and extremely non-abrasive.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current
1 23807 3	081165	1	40 m	AT-N07V3V3-F 3G2,5	BREMAXX ®	Orange	320 mm	16 A

Design protected. / Patent pending.



Garant®

Top in quality and design, for every requirement and use.

- Reel body made of special break-resistant Breflex plastic.
- With triple socket outlet 240 V with self-closing cover providing protection against dust and contamination.
- Ergonomic handle and axle for precision cable-management when winding and rewinding.

Article No.	EAN-Code 4007123...	UP	QTY. pallet	Packaging	Cable length	Cable	Reel-Ø	Safety Cut Out	Nominal current
1 20801 3	118977	1	48			without cable	290 mm	X	
1 21805 3	017584	1	54		25 m	H05VV-F 3G1,5	240 mm	X	13 A
1 20806 3	017591	1	48		50 m	H05VV-F 3G1,5	290 mm	X	13 A
1 20811 3	118984	1	54		20 m	H05VV-F 3G2,5 extra heavy-duty cable	240 mm	X	13 A
1 20812 3	118991	1	48		40 m	H05VV-F 3G2,5 extra heavy-duty cable	290 mm	X	13 A
1 21815 3	140947	33		1/2 sales pallet	25 m	H05VV-F 3G1,5	240 mm	X	13 A
1 21875 3	133000	1	54		25 m	H05VV-F 3G1,5 with RCD-plug 30 mA	240 mm	X	13 A

Design protected.



Garant® Bretec®

With the unique Bretec® Anti Cable Twist System for comfortable working.


- With the unique Bretec® Anti Cable Twist System for comfortable working.
- With triple socket outlet 240 V with self-closing cover providing protection against dust and contamination.
- Reel body made from special Breflex plastic on a galvanised frame.
- Ergonomic handle and axle for precision cable-management when winding and rewinding.

Article No.	EAN-Code 4007123...	UP	QTY. pallet	Cable length	Cable	Cable colour	Reel-Ø	Safety Cut Out	Nominal current
1 20885 3	054893	1	54	25 m	H05VV-F 3G1,5	Red	240 mm	X	13 A
1 20886 3	054909	1	48	50 m	H05VV-F 3G1,5	Red	290 mm	X	13 A

Design protected.



The one has got a Bretec;
the other's got a mess.

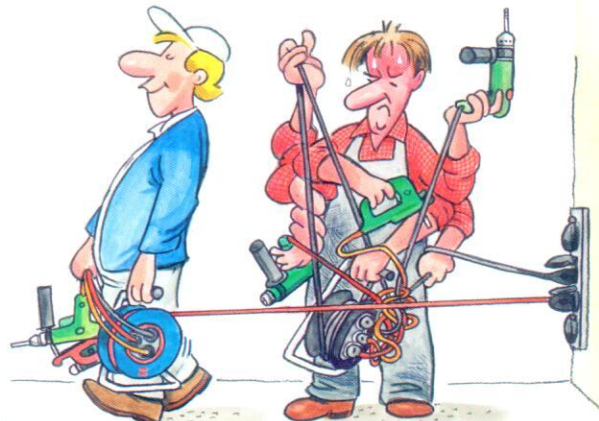



Smoke Detector RM L 3100

Particularly suitable for long-term use.

- VDS tested according to DIN EN 14604.
- Smoke detector with quality seal „Q“, complies to the increased demands of regulations 14-01 vfdb.
- With approved long-life cycle and reduction of false alarm signals.
- Increased stability against outer effect.
- 10 years of operational life without changing battery.
- 3 V lithium battery fixed in devices for constant operational readiness.
- Optical function display, with test button for the functional check.
- Includes mute function for false alarm and „Do not disturb function“ for low battery level.
- Shriill alarm - 85 dB.*
- Optical and acoustic signal when the battery is low.
- Includes mounting materials.
- In colourful display-packaging.



Article No.	EAN-Code	UP	Height x Diameter	Signal sound	Battery type
1 29005 0	631636	1	31 x 100 mm	85 dB	3 V DC



Smoke Detector RM C 9010

Smoke detectors save lives!

More safety for you, your family and your property!

- Photoelectric detector, tested in accordance with EN 14604.
- Optical function display, with test button for the functional check.
- Shriill alarm - 85 dB.
- Acoustic signal when the battery is low.
- Includes nine-volt battery. Service life at least 1 year.
- Includes mounting materials.
- In colourful display-packaging.



Article No.	EAN-Code	UP	Height x Diameter	Signal sound	Battery type
1 29008 0	640911	1	35 x 100 mm	85 dB	1 x 9 V



Garant® S 3

The robust cable reel made of rust-resistant, hot-dip galvanised steel sheet.

- With triple socket outlet 240 V with self-closing cover providing protection against dust and contamination.
- Ergonomic handle and axle for precision cable-management when winding and rewinding.

Article No.	EAN-Code 4007123...	UP	QTY. pallet	Cable length	Cable	Cable colour	Reel-Ø	Safety Cut Out	Nominal current
1 19801 3	142026	1	48		without cable		290 mm	X	
1 19805 3	133017	1	54	25 m	H05VV-F 3G1,5	Black	240 mm	X	13 A
1 19811 3	133031	1	54	20 m	H05VV-F 3G2,5 extra heavy-duty cable	Black	240 mm	X	13 A
1 19806 3	133024	1	48	50 m	H05VV-F 3G1,5	Black	290 mm	X	13 A



Standard AK 260

- Reel body made of break-resistant plastic.
- Robust, galvanised steel tube frame.
- With triple socket 240 V.

Article No.	EAN-Code 4007123...	UP	Packaging	Cable length	Cable	Cable colour	Reel-Ø	Safety Cut Out	Nominal current
1 09825 3 001	140817	1	Single boxed	25 m	05VV-F	Black	260 mm	X	13 A
1 09840 3 001	140824	1	Single boxed	40 m	05VV-F	Black	260 mm	X	13 A
1 09825 3 027	140800	27	Pallet	25 m	05VV-F	Black	260 mm	X	13 A



Compact Cable Reel AK 180

- With triple socket outlet 240 V with self-closing cover providing protection against dust and contamination.
- Small and handy reel, fits in most tool boxes.

Article No.	EAN-Code 4007123...	UP	QTY. pallet	Cable length	Cable	Cable colour	Reel-Ø	Safety Cut Out	Nominal current
1 07818 3 004	140787	4	112	15 m	H05VV-F 3G1,5	Black	180 mm	X	13 A